



Technical specification

Cold Milling Machine W 210/W 210i




Technical specification

	Cold milling machine W 210 and W 210i		
Milling drum	Option FB 1,500	Standard FB 2,000	Option FB 2,200
Milling width	1,500 mm	2,000 mm	2,200 mm
Milling depth *1	0–310 mm	0–330 mm	0–330 mm
Tool spacing	15 mm	15 mm	15 mm
Number of tools	136	162	174
Drum diameter with tools	1,020 mm		
Engine	W 210		W 210i
Manufacturer	CUMMINS		
Type	QSL 8.9 + QSC 8.3		QSL 9 + QSL 9
Cooling	Water		
Number of cylinders	6 + 6		
Rated power at 2,100 min ⁻¹	470 kW/630 HP/639 PS		507 kW/680 HP/690 PS
Maximum power at 1,900 min ⁻¹	500 kW/671 HP/680 PS		534 kW/716 HP/726 PS
Operating power at 1,600 min ⁻¹	469 kW/628 HP/638 PS		494 kW/663 HP/672 PS
Displacement	17.2 l		18 l
Fuel consumption at rated power	131 l/h		136 l/h
Fuel consumption in field mix	52 l/h		54 l/h
Emission standards	EU Stage 3a/US Tier 3		EU Stage 3b/US Tier 4i
Electrical system	24 V		
Filling capacities			
Fuel tank	1,220 l		
Hydraulic fluid tank	200 l		
Water tank	3,350 l		
Driving properties			
Travel speed in milling and travel gear, max	0–85 m/min (5 km/h)		
Crawler tracks			
Crawler tracks front and rear (L x W x H)	1,730 x 300 x 610 mm		
Loading the milled material			
Belt width of primary conveyor	850 mm		
Belt width of discharge conveyor	850 mm		
Theoretical capacity of discharge conveyor	375 m³/h		
Shipping dimensions	W 210		W 210i
Machine, optional milling width 1,500 mm (L x W x H)	8,300 x 2,500 x 3,000 mm		8,640 mm x 2,500 x 3,000 mm
Machine, standard milling width 2,000 mm (L x W x H)	8,300 x 2,500 x 3,000 mm		8,640 mm x 2,500 x 3,000 mm
Machine, optional milling width 2,200 mm (L x W x H)	8,300 x 2,700 x 3,000 mm		8,640 mm x 2,700 x 3,000 mm
Discharge conveyor (L x W x H)	7,900 x 1,450 x 1,500 mm		

^{*1} = The maximum milling depth may deviate from the value indicated, due to tolerances and wear.

Dimensions in mm

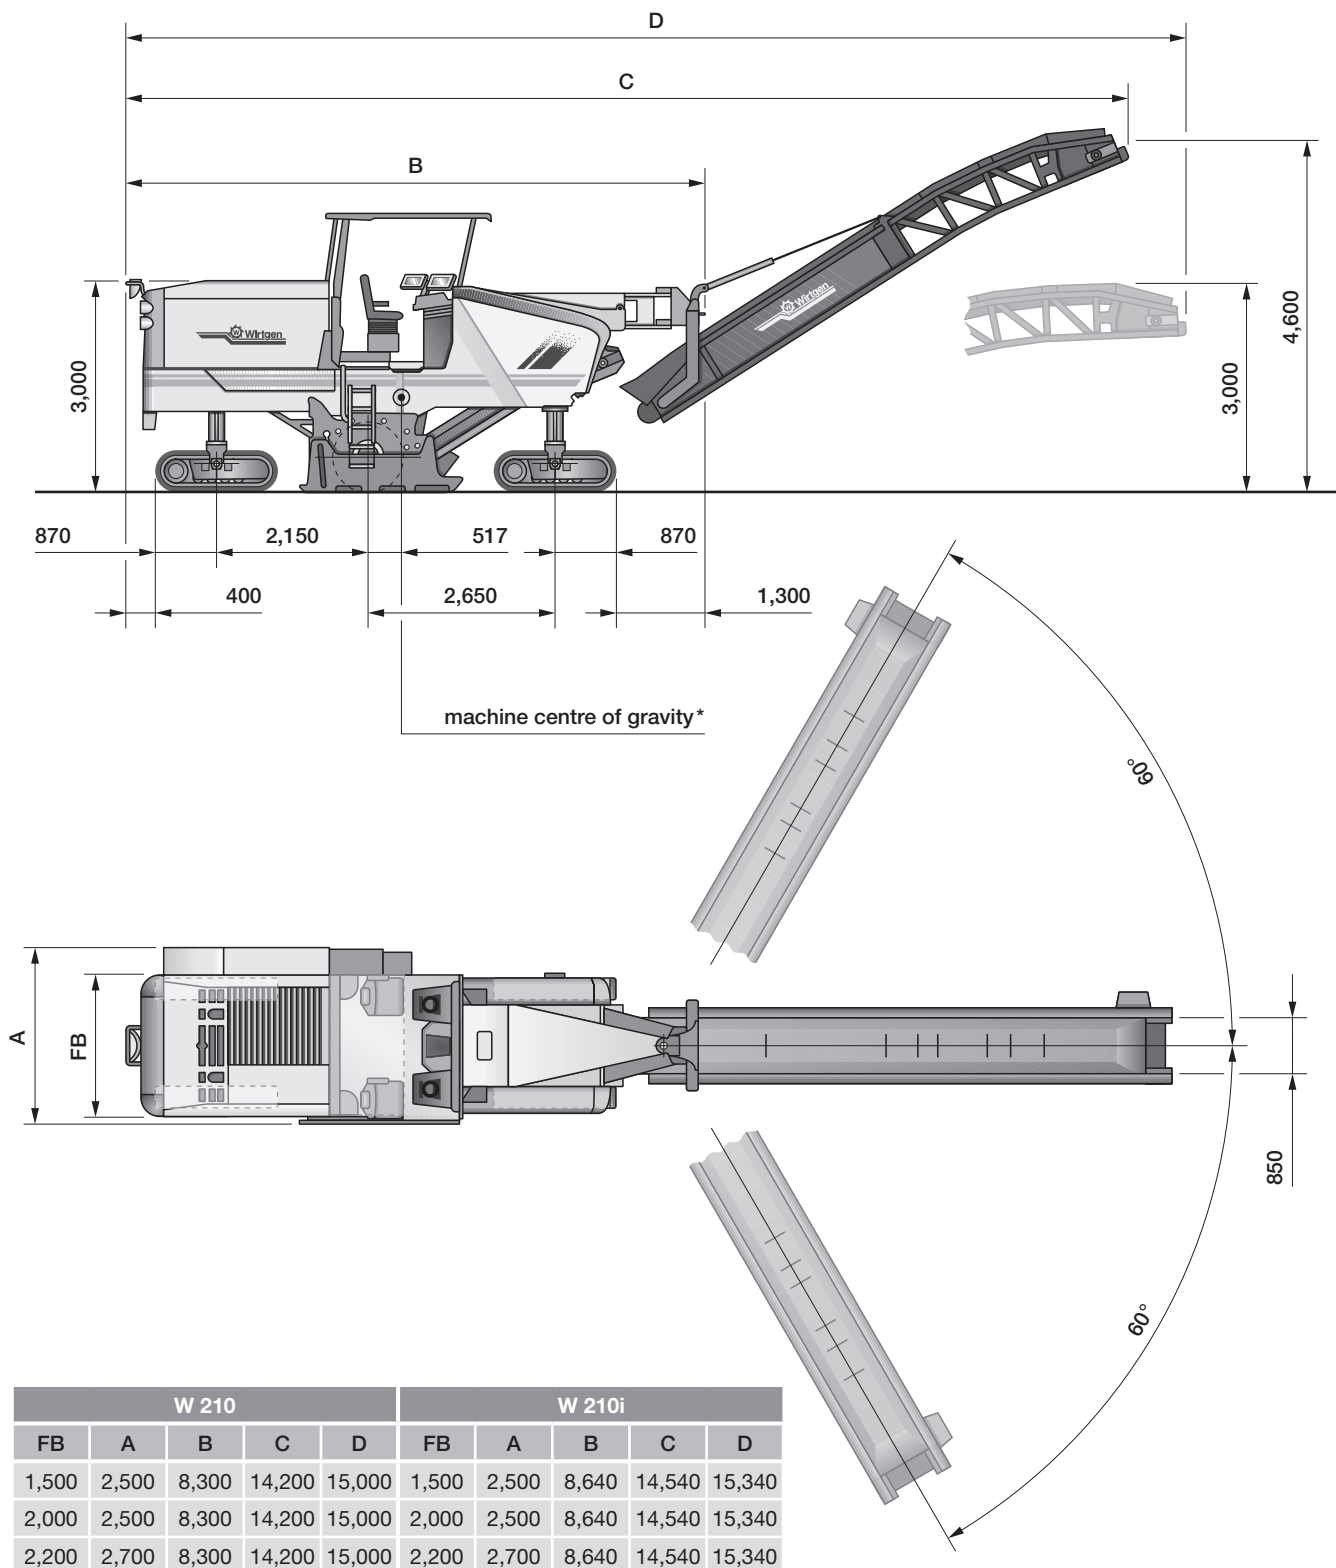


* = based on operating weight, CE, with conveyor folded out

	Machine weights W 210	Machine weights W 210i
Empty weight of machine without filling media	25,900 kg	26,600 kg
Operating weight, CE *	28,180 kg	28,880 kg
Operating weight, max. (full tanks, full range of equipment), milling width 2,200 mm	36,050 kg	37,050 kg
	Weights of filling media	
Water tank filling in kg	3,350 kg	3,350 kg
Diesel tank filling in kg (0.83 kg/l)	1,000 kg	1,000 kg
	Optional equipment features increasing / reducing empty weight	
Driver and tools		
Driver	75 kg	75 kg
Weight of 5 cutting tool containers	125 kg	125 kg
On-board tools	30 kg	30 kg
Optional milling drum assemblies in lieu of standard		
Milling drum housing, milling width 2,200 mm	200 kg	200 kg
Milling drum housing, milling width 1,500 mm	100 kg	100 kg
Milling drum housing, milling width 2,000 mm, FCS-L	650 kg	650 kg
Milling drum housing, milling width 2,200 mm, FCS-L	900 kg	900 kg
Optional milling drums in lieu of standard		
Milling drum, milling width 2,200 mm, tool spacing 15	150 kg	150 kg
Milling drum, milling width 1,500 mm, tool spacing 15	- 400 kg	- 400 kg
Milling drum, milling width 2,000 mm, tool spacing 15, FCS-L	- 150 kg	- 150 kg
Milling drum, milling width 2,200 mm, tool spacing 15, FCS-L	0 kg	0 kg
Milling drum, milling width 2,000 mm, tool spacing 8, FCS-L	800 kg	800 kg
Milling drum, milling width 2,200 mm, tool spacing 8, FCS-L	1,000 kg	1,000 kg
Optional additional equipment		
Operator's platform with comfortable seats in lieu of standard	250 kg	250 kg
Canopy in lieu of standard	280 kg	280 kg
Cabin in lieu of standard	600 kg	600 kg
Folding conveyor in lieu of standard	520 kg	520 kg
VCS – Vacuum Cutting System	150 kg	150 kg
Supplementary weight 1 for flexible use	1,400 kg	1,700 kg
Supplementary weight 2 for flexible use	1,000 kg	1,000 kg

* = weight of machine with half-full water tank, half-full fuel tank, driver (75 kg) and on-board tools

Rear view of machine with different milling width options

Dimensions in mm

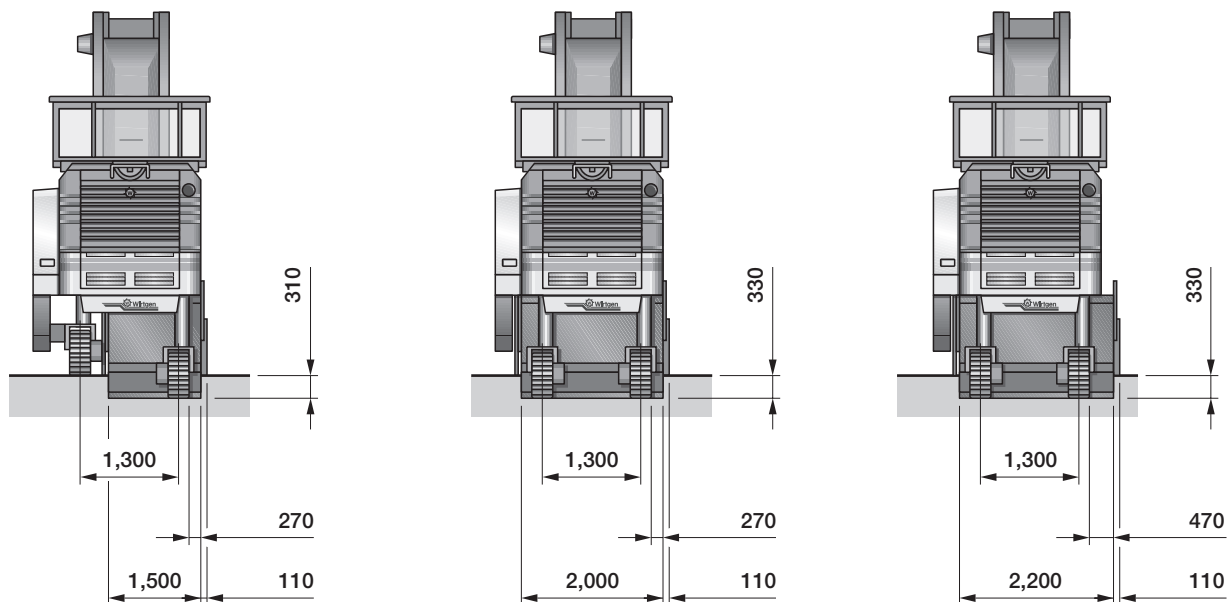


1.50 m wide drum assembly

2.00 m wide drum assembly



2.20 m wide drum assembly

Machine transport with optional canopy and hydraulic folding conveyor

Dimensions in mm

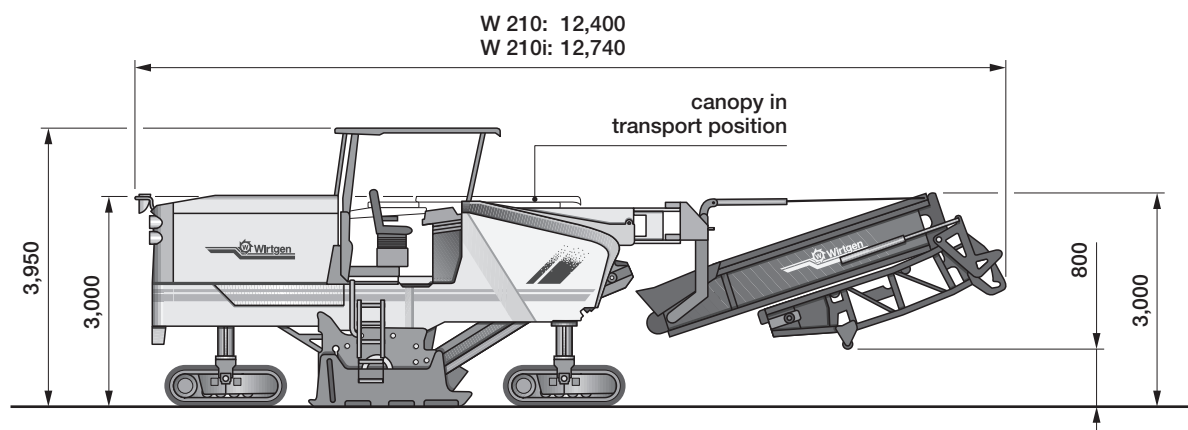

Milling radius, 150 mm milling depth Dimensions in mm

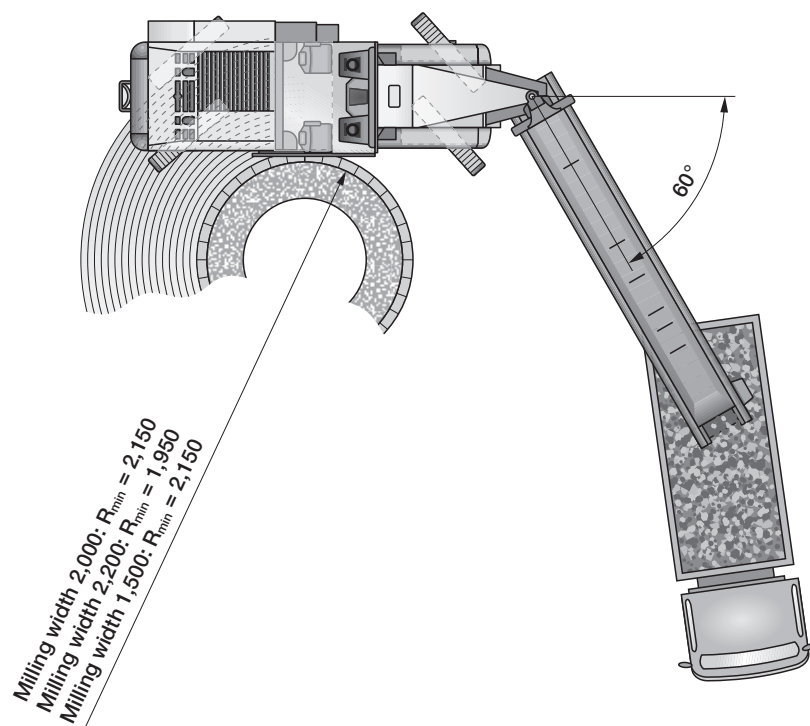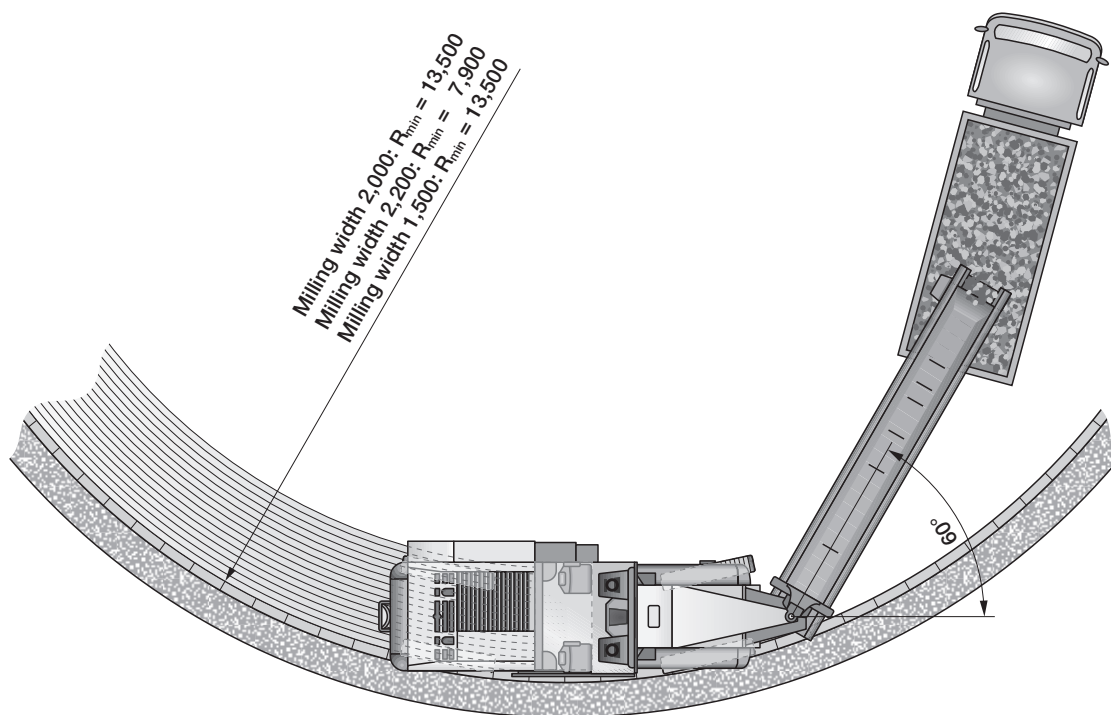

Equipment features of cold milling machine W 210 and W 210i

Standard equipment:

Basic machine with engine

- Machine frame with dual wasp waist
- Hydraulically opening, soundproof engine cowling
- Air compressor system
- Battery-operated hydraulic module for hydraulic cylinder functions and for emergency functions
- Automatically engaging high-pressure water system, 18 bar, 67 l/min
- Engine cooling system with temperature-governed fan speed
- Large storage compartments for cutting tool containers
- Standard painting in Wirtgen white with orange stripes

Milling drum housing

- Milling drum housing for milling width 2,000 mm without FCS features
- Three electrically engageable milling drum speeds
127 1/min - 109 1/min - 97 1/min
- Hydraulically movable and adjustable scraper blade with automatic locking function
- Hydraulically lifting side plates, clearance right 450 mm, clearance left 330 mm
- Two separately engageable water spray bars in the milling drum assembly

Milling drums

- Milling drum, milling width 2,000 mm, HT11, tool spacing LA15
- Multiple-use ejector system

Loading of milled material

- Conveyor system with manually or automatically adjustable conveying speed
- Water spray system at the primary conveyor
- Slewing angle of discharge conveyor $\pm 60^\circ$

Machine and levelling control

- Clearly structured main control panel with functional switches
- Multi-functional control screen including display of major machine parameters
- Multifunctional truck loading indicator integrated in control screen
- Comprehensive diagnostic system included in control screen
- Automatically engaging milling power control unit
- Two exterior control panels for operation by ground staff
- Digital electric height indicator
- Full pre-installation for up to 7 levelling sensors per machine side

Operator's platform

- Fully anti-vibration mounted operator's platform
- Convenient, individually adjustable control panel
- Convenient access to operator's platform with stand-up seat, left and right
- Lockable covers for control panels
- Two mirrors at the front, one mirror at the centre, one mirror at the rear of the machine

Chassis and height adjustment

- PTS – machine is aligned parallel to the pavement surface automatically
- ISC – intelligent crawler track speed control through hydraulic four-track drive
- High machine stability through four-fold full-floating axle
- Four-track steering with freely selectable steering modes
- Extremely wear-resistant, two-piece EPS polyurethane track pads

Miscellaneous

- Lighting package with 14 halogen working spotlights
- Comprehensive toolkit in lockable toolbox
- Comprehensive safety package with 6 emergency stop switches
- European design type certification, GS mark (Geprüfte Sicherheit = Tested Safety) and CE conformity
- Standard warranty of 12 months or 1,000 engine operating hours
- Machine commissioning by qualified personnel
- Comprehensive operating manual and machine documentation

Optional equipment:

Basic machine with engine

- Special painting in one, two or several colours

Milling drum housing

- Milling drum housing for milling width 1,500 mm
- Milling drum housing for milling width 2,200 mm
- Milling drum housing for milling width 2,000 mm, FCS-Light
- Milling drum housing for milling width 2,200 mm, FCS-Light
- Drum turning device for cutting tool replacement
- Pneumatic cutting tool driver and extractor
- Max. 2 electro-hydraulically operated cutting tool extractors
- Fold-out additional seats at the rear crawler tracks for cutting tool replacement

Milling drums

- Milling drum, milling width 2,200 mm, HT11
- Milling drum, milling width 2,000 mm, HT11, LA15, FCS-Light
- Milling drum, milling width 2,200 mm, HT11, LA15, FCS-Light
- Milling drum, milling width 2,000 mm, HT11, LA8, FCS-Light
- Milling drum, milling width 2,200 mm, HT11, LA8, FCS-Light
- Milling drum, milling width 2,000 mm, HT5, LA6x2, FCS-Light
- Milling drum, milling width 2,200 mm, HT5, LA6x2, FCS-Light
- Milling drum, milling width 2,000 mm, HT11, LA25, FCS-Light
- Milling drum, milling width 2,200 mm, HT11, LA25, FCS-Light
- Mounting carriage for milling drums

Loading of milled material

- Hydraulically folding discharge conveyor
- VCS – vacuum cutting system
- Conveyor support legs for machine transport

Machine and levelling control

- Data interface with data transmission in accordance with WIFMS
- LEVEL PRO automatic levelling system with hydraulic milling depth sensors at the side plates, left and right
- Additional LEVEL PRO control panel
- Milling depth detection via sensor package and display on the LEVEL PRO screen
- RAPID SLOPE cross slope sensor
- Hydraulic cylinder sensor to scan the milling depth in front of the milling drum, right
- Hydraulic cylinder sensor to scan the milling depth in front of the milling drum, left and right
- Laser sensor with laterally movable hydraulic levelling arm including laser transmitter and laser receiver
- Sonic ski sensor for scanning a stringline
- Multiplex sensors with two additional ultrasonic sensors including bracket and cable in 3-fold Multiplex system package, right
- Multiplex sensors with two additional ultrasonic sensors including bracket and cable in 3-fold Multiplex system package, left and right
- Pre-installation of laser sensor including laser signal receiver but excluding laser signal transmitter
- Pre-installation for 3D GPS levelling including receiver mast

Operator's platform

- Operator's platform with individually adjustable, comfortable driver's seats, left and right
- Operator's cabin as part of the "Operator Comfort System"
- Operator's platform heating by conducting warm air into the footwell area
- Complete set of fold-in mirrors, partly electric, with stop-and-go indicator
- Hydraulically retracting protective canopy

Miscellaneous

- Screen system including display
- Hydraulically operated electrical generator with a capacity of 4 kW at 220 volts
- Hydraulically operated electrical generator with a capacity of 4 kW at 110 volts
- Lighting balloon, 2 kW operated at 220 volts
- Lighting balloon, 2 kW operated at 110 volts
- Electrically operated diesel tank filling pump
- Hydraulically operated water tank filling pump
- Lighting package with 8 halogen and 6 Xenon spotlights
- Bolt-on supplementary weight 1 of 1,400 kg (1,700 kg)
- Bolt-on supplementary weight 2 of 1,000 kg (additional)
- Large storage compartment in lieu of standard storage compartment at the rear of the machine
- Hydraulically operated high-pressure water cleaner, 150 bar, 15 l/min



Wirtgen GmbH
Reinhard-Wirtgen-Strasse 2 · 53578 Windhagen · Germany
Phone: +49 (0) 26 45/131-0 · Fax: +49 (0) 26 45/131-242
Internet: www.wirtgen.com · E-Mail: info@wirtgen.com