


50 GSL/PT

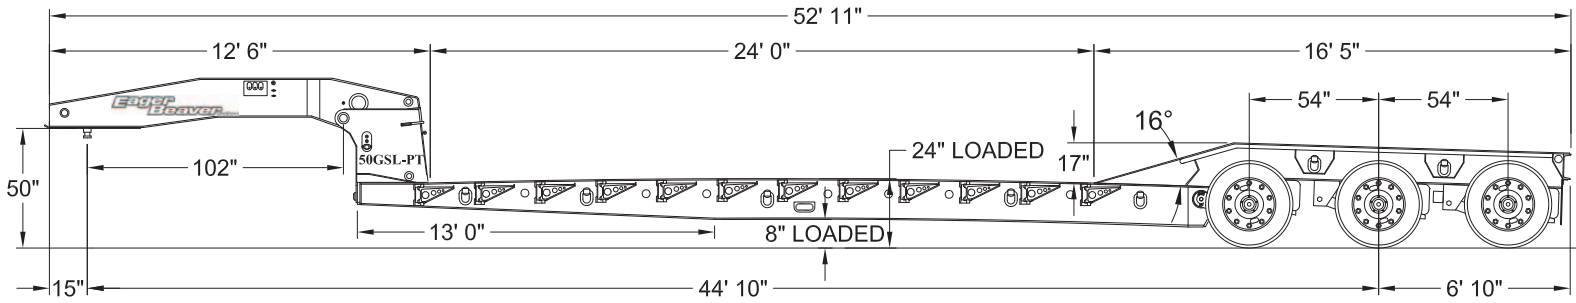

SPECIFICATIONS

Capacity: 100,000 lbs. **Trailer Weight:** 22,700 lbs.

Deck Width 8 ft. 6 in. Length: 24 ft. Height: 24 in. (Loaded)

Frame	Mainrails: Four fabricated 16" Deep cambered I-Beam, 80,000 P.S.I. steel wheel covers, wood in center
-------	---

Crossmembers	10" x 9 lbs. per ft. I-Beam, pierced through mainbeam (18" spacing Std.)
--------------	--

Gooseneck Length 82", 86", 90", 94", 98" and 102" available (For special lengths contact sales)

Decking 1 1/2" Apitong Decking Full Width

Wiring Harness Sealed L.E.D. Lights & USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug

Front Ramps Front Flip (Wood filled)

Hydraulics Wetline hook-up for tractor PTO operation • REQUIREMENT: Low Flow/High Pressure System

Hydraulic Cylinders Two Main 7", One 3" Locking, One 4" Gooseneck Support

Controls	Control Valve eye level
	

Lift Axle	Air Lift 3rd Axle
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

Tie Down 7 per side - Patented "ROTO RINGS"® Swivel 360°

Outriggers Cast Steel (Locks both in and out position)

Colors Black, Yellow, Blue (standard) Imron Paint

RUNNING GEAR

Tires Twelve 255/70R22.5 (H) Steel Belted Radial

Hubs/Wheels	Six Disc Type Hubs, Twelve 8.25 x 22.5 Disc Type Wheels, Stemco Oil Seals, Hub Piloted
-------------	--

Suspension	Air Ride (Combined Capacity 75,000 lbs.) Dump Valve, Air Lift 3rd Axle
------------	--

Axles Three 5" diameter 25,000 lbs. each, H.M. series bearings

Brakes 16 1/2" x 7" Air, "S" Cam., Auto Slack Adjusters

ALL WHEEL ABS Anti-lock brake system 4S3M, Sensors on (2) Axles, 3 modulator valves

Parking Brake Spring Brakes on All Wheels

OPTIONS

Additional Deck Length: (25'-26'-27'-28' Optional Lengths)

Additional Deck Width: (108" w/ 102" axles or 108" axles) - (120" w/ 120" axles)

Gooseneck Fenders

Power Pack: 11hp, 12hp Kohler, 13hp Honda, or 16hp Kohler (Combination Power Pack/Wet Kit Available)

Lockable Tool & Chain Storage: Forward center deck area (1 or 2 compartments)

Additional "ROTO-RINGS"®

Spare Tire & Disc Wheel 255/70R22.5 (H) Optional: Spare Tire Carrier

Tire & Disc Wheel 275/70R22.5 (H) Upgrade

Oak Decking in lieu of Apitong

Paint (other than standard Black, Yellow, Blue) Price on Request



Call (800) 257-8163 for more information